

Fire detector FD V.1.02 _





The fire detector uses the LoraWan network to send messages.

The sensor board is protected by a sealed plastic case, which is equipped with a tamper sensor and a displacement sensor.

Options	Meaning
Operating frequency ranges	RU864-868 EU863-870 KZ865-868
Operating temperature range, °C	- 40...+85
Overall dimensions, mm	100 x60
Weight, g	120
Degree of protection	IP67
Life time	At least 10 years
Battery operation	At least 6 years

Web interface

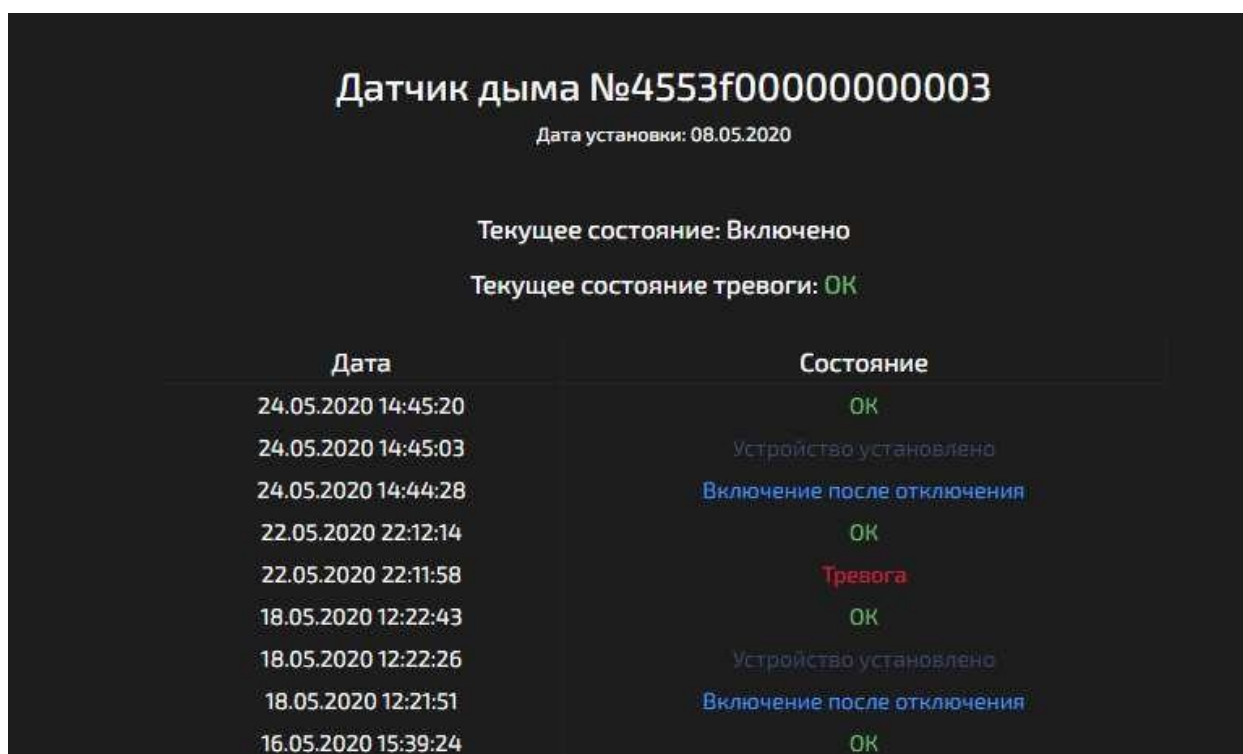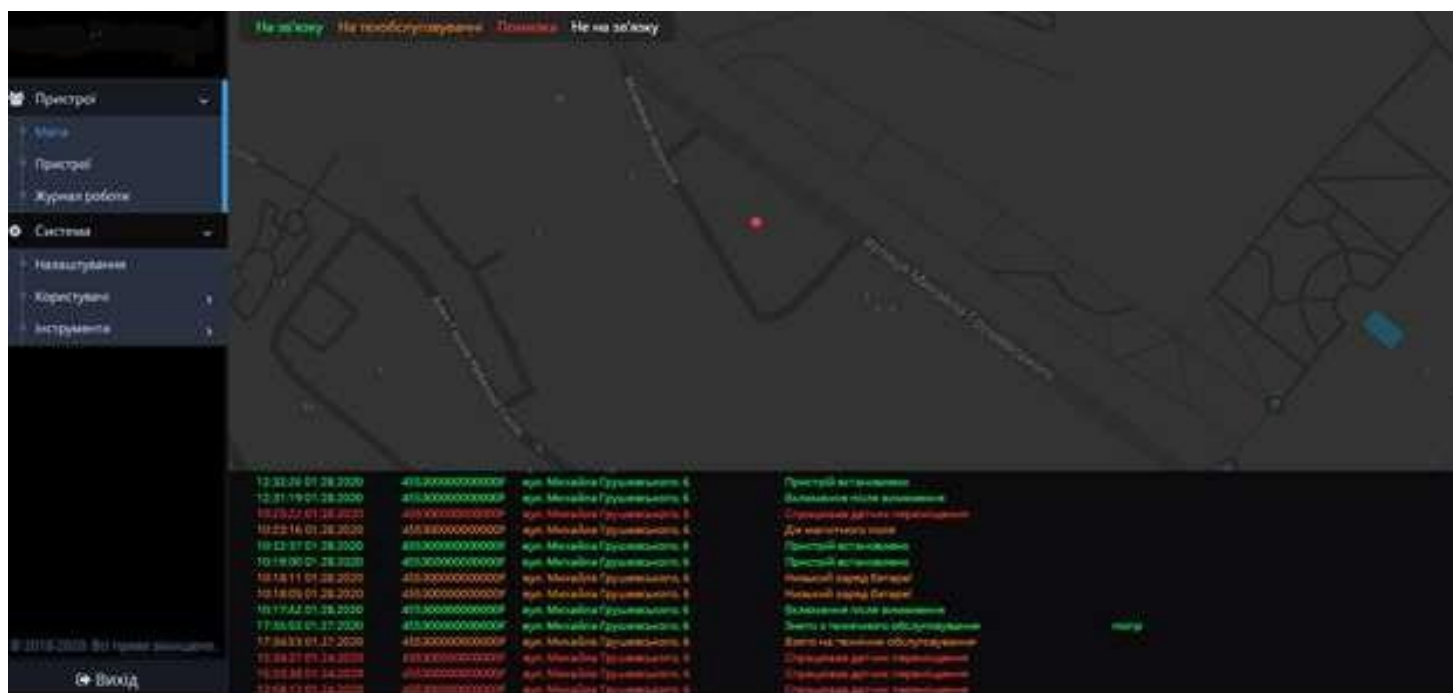

A convenient interface for controlling fire in premises , which allows you to display: whether the sensor is connected or not, alarm events, case opening, signal level, etc. On the map, you can display all sensors or layers, depending on the events.

When installing the sensor, it is enough to point the smartphone camera at the QR code of the sensor and the page with the current signal level of the sensor will be displayed in the browser, as well as an invitation to enter information about the location of the sensor. The sensor will automatically appear in the monitoring system.

IoT Manager

Идентификатор 4553000000000006

Уровень сигнала -110.0

Город

Улица

Номер здания

Сохранить