

Fire detector FD V.1.02 _




The fire detector uses the NB-IoT network to send messages.

The sensor board is protected by a sealed plastic case, which is equipped with a tamper sensor and a displacement sensor.

Options	Meaning
Operating frequency ranges	B1(2100), B3(1800), B5(850), B7(2600) B8(900) B200(800)
Operating temperature range, °C	- 40...+85
Overall dimensions, mm	100 x60
Weight, g	120
Degree of protection	IP67
Life time	At least 10 years
Battery operation	At least 6 years

Web interface

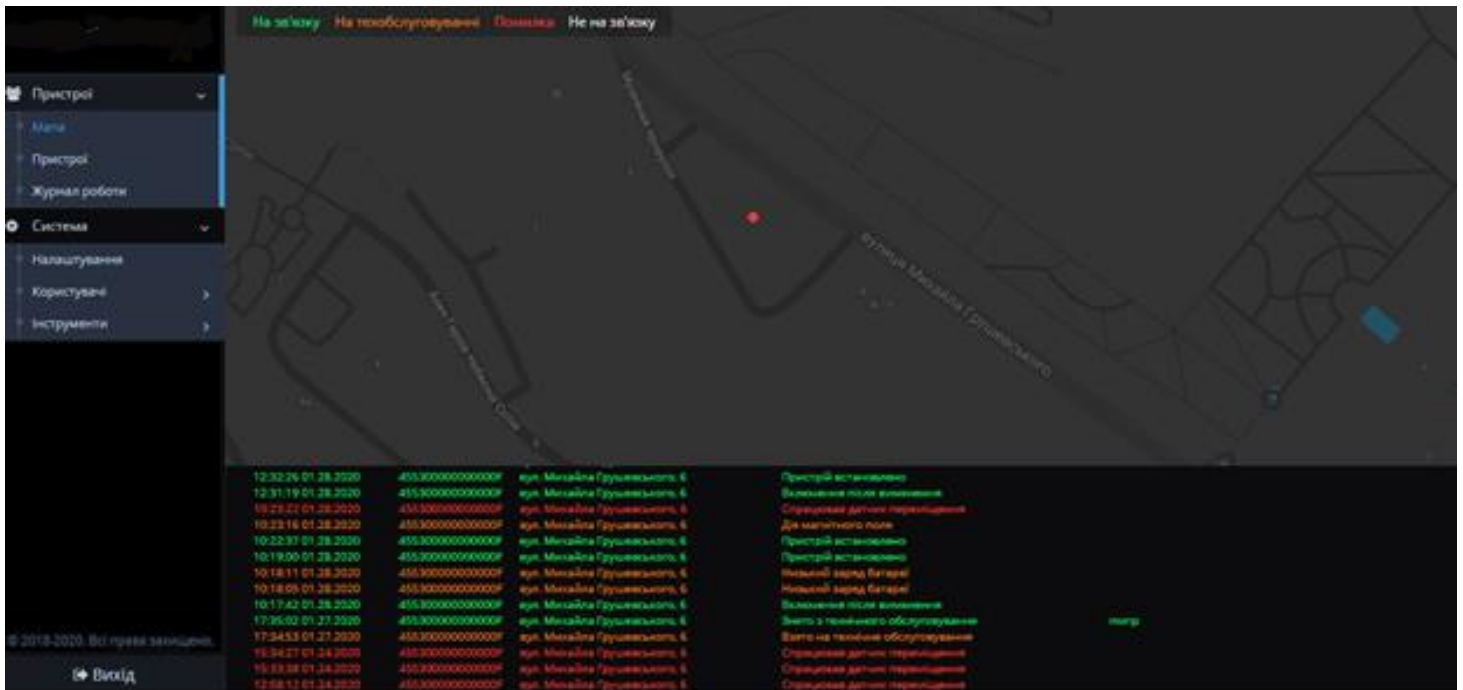

Датчик дыма №4553f00000000003	
Дата установки: 08.05.2020	
Текущее состояние: Включено	
Текущее состояние тревоги: OK	
Дата	Состояние
24.05.2020 14:45:20	OK
24.05.2020 14:45:03	Устройство установлено
24.05.2020 14:44:28	Включение после отключения
22.05.2020 22:12:14	OK
22.05.2020 22:11:58	Тревога
18.05.2020 12:22:43	OK
18.05.2020 12:22:26	Устройство установлено
18.05.2020 12:21:51	Включение после отключения
16.05.2020 15:39:24	OK

A convenient interface for controlling fire in premises , which allows you to display: whether the sensor is connected or not, alarm events, case opening, signal level, etc. On the map, you can display all sensors or layers, depending on the events.

When installing the sensor, it is enough to point the smartphone camera at the QR code of the sensor and the page with the current signal level of the sensor will be displayed in the browser, as well as an invitation to enter information about the location of the sensor. The sensor will automatically appear in the monitoring system.

Kyiv City . LLC CNetS

+380503115681 , +380675502081, sales@cnetS.com.ua www.cnetS.com.ua

IoT Manager

Идентификатор 4553000000000006

Уровень сигнала -110.0

Город

Улица

Номер здания

Сохранить