

## WATER LEAK SENSOR WD V.1.02 \_




monitoring sensor uses NB-IoT to send messages.

The sensor consists of a modem unit and a probe. The modem block is mounted on a flat surface with the help of self-tapping screws or dowels in the zone of reliable radio signal reception. The length of the probe is 3m, it is installed in the place of leakage control. Also, the sensor has a monoblock design.

The modem board is protected by a sealed plastic case, which is equipped with an opening sensor and a movement sensor.

| Options                         | Meaning                                                 |
|---------------------------------|---------------------------------------------------------|
| Operating frequency ranges      | B1(2100), B3(1800), B5(850), B7(2600) B8(900) B200(800) |
| Operating temperature range, °C | - 40...+85                                              |
| Overall dimensions, mm          | 70x60x30, 70x30                                         |
| Weight, g                       | 140, 135                                                |
| Degree of protection            | IP67                                                    |
| Life time                       | At least 10 years                                       |
| Battery operation               | At least 6 years                                        |

## Web interface

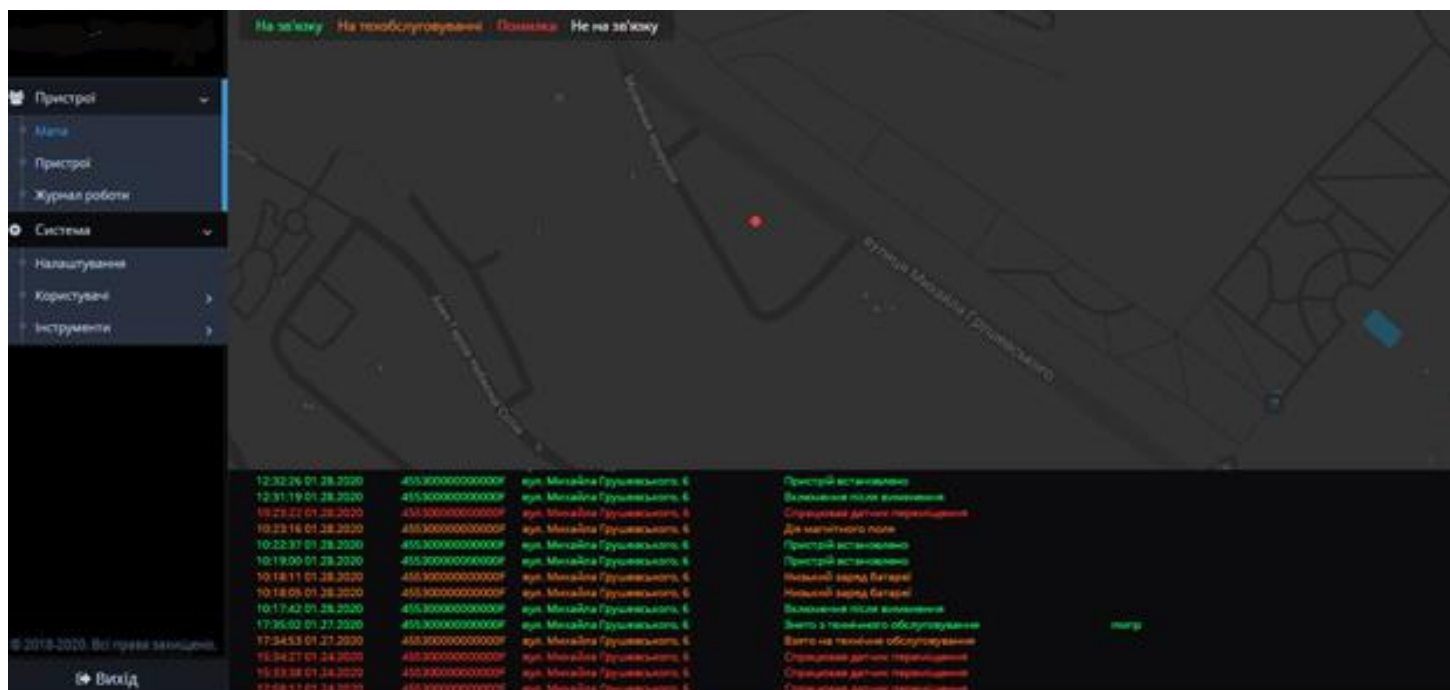

| Датчик воды №4553f000000000004 |                            |
|--------------------------------|----------------------------|
| Дата установки: 08.05.2020     |                            |
| Текущее состояние: Включено    |                            |
| Текущее состояние тревоги: ОК  |                            |
| Дата                           | Состояние                  |
| 19.07.2020 22:33:28            | ОК                         |
| 09.06.2020 23:41:03            | Тревога                    |
| 09.06.2020 23:41:01            | Тревога (датчик сработал)  |
| 09.06.2020 23:40:33            | Тревога                    |
| 09.06.2020 23:40:31            | Тревога (датчик сработал)  |
| 09.06.2020 16:35:39            | Включение после отключения |
| 04.06.2020 18:11:20            | Тревога                    |
| 04.06.2020 18:11:18            | Тревога (датчик сработал)  |
| 04.06.2020 18:08:42            | Тревога                    |
| 04.06.2020 18:08:40            | Тревога (датчик сработал)  |
| 03.06.2020 13:10:58            | Тревога                    |
| 03.06.2020 13:10:55            | Тревога (датчик сработал)  |
| 03.06.2020 13:10:53            | Тревога                    |
| 03.06.2020 13:10:51            | Тревога (датчик сработал)  |
| 03.06.2020 13:08:45            | Тревога                    |
| 03.06.2020 13:08:42            | Устройство установлено     |
| 03.06.2020 13:08:07            | Включение после отключения |

Kyiv City . LLC CNetS

+380503115681, +380675502081, sales@cnetS.com.ua www.cnetS.com.ua

A user-friendly water leak monitoring interface that allows you to display: whether the sensor is connected or not, alarm events, case opening, signal level, etc. On the map, you can display all leak sensors or in layers, depending on the events.

When installing the sensor, it is enough to point the smartphone camera at the QR code of the sensor and the page with the current signal level of the sensor will be displayed in the browser, as well as an invitation to enter information about the location of the sensor. The sensor will automatically appear in the monitoring system.

## IoT Manager

Идентификатор

4553000000000006

Уровень сигнала

-110.0

Город

Київ

Улиця

вул. Банкова

Номер здания

9

Сохранить